


LOCKING POWER

LEGAFLOOR

INTERLOCKING
SHOCK AND SCUFF
RESISTANT
VINYL FLOORING

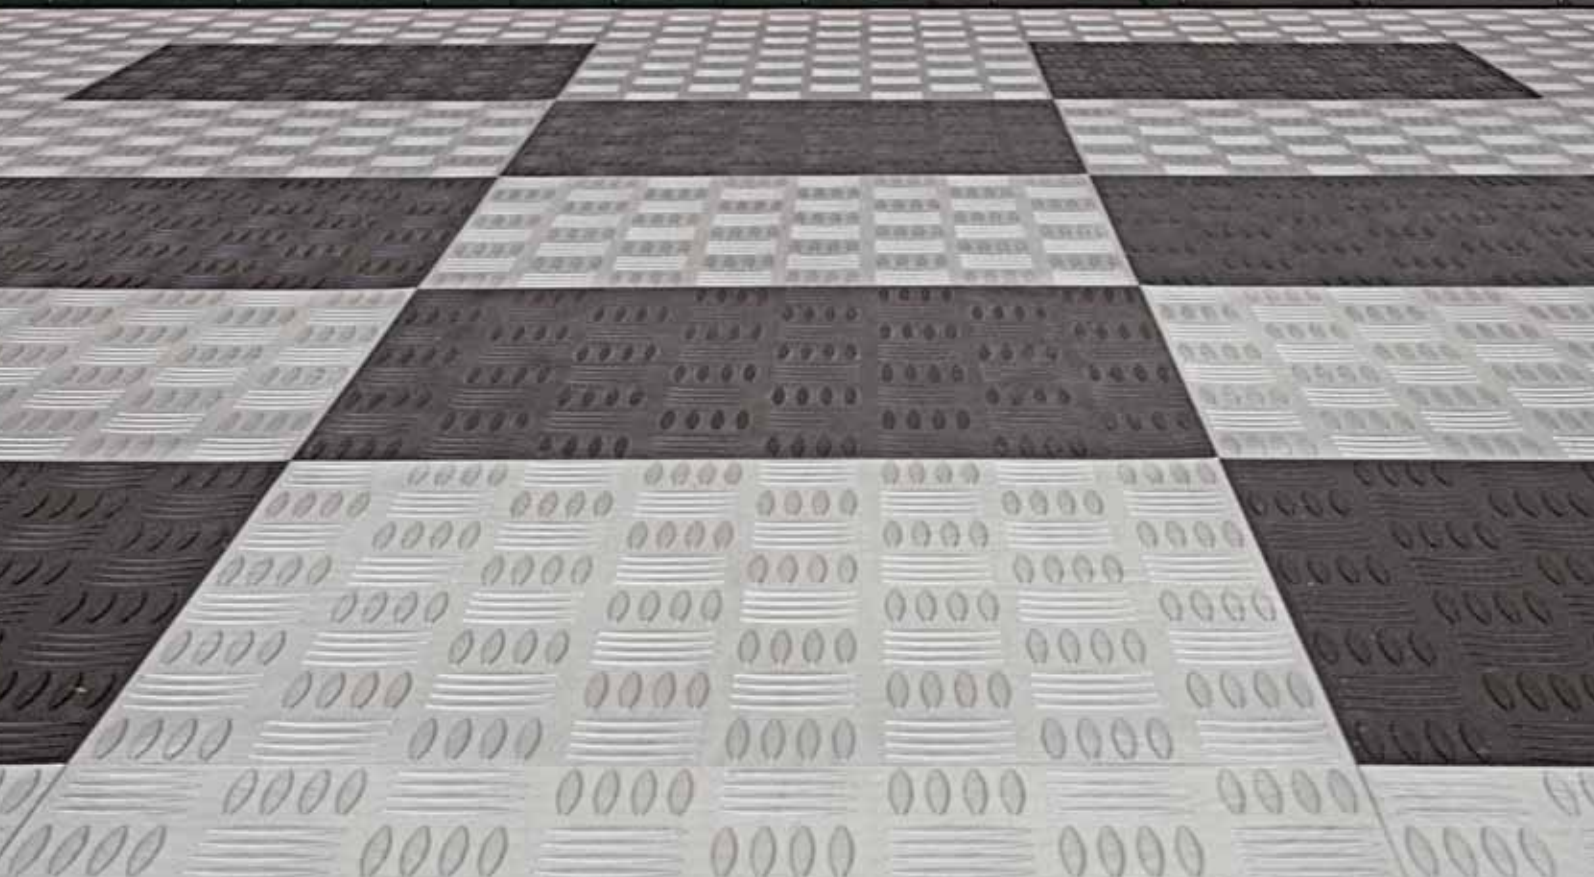

SOGEA

THE NATURE OF PLASTICS

 MADE IN ITALY

LEGAFLOOR



Art. 2002
Ardesia design
Tiles: 30x30 cm
Thickness: 0.85 cm
Colors: white, light grey,
dark grey, black



Art. 2005
Round dot design
Tiles 30x30 cm
Thickness: 0.85 cm
Colors: white, light grey,
dark grey, black, light blue,
red, green



Art. 2008
Corrugated effect
Tiles: 30x30 cm
Thickness: 0.85
Colors: silver and black



Interlocking, modular resilient vinyl flooring. No adhesive needed. It can be installed without professional help on any smooth surface, even if humid. Perfect in situations when new flooring must be installed quickly and cheaply.

Fire resistance:
CE class Bfl-s1

Dimensional stability:
(UNI 7071) 6h 80°C,
variations -0.8%

Wear resistance:
(ASTM D 1044)
Taber abraser tester:
load 1000g mole CSI7 -
Weight loss for each 100
rev: 4.8 mg

Specific weight:
(ASTM D792) 1.39 g/cm³

Residual penetration:
(UNI 7071) 0.14mm

Deflection under load:
(ASTM D621)
at 10% load 27kg/cm²
at 30% load 89kg/cm²

As for all vinyl flooring, prolonged contact with tires or other rubber objects can cause indelible brown marks. Further, as adhesive is not used to fix tiles, forklifts and carts are not recommended.

Beyond 50 sq. meters the use of expansion joints is mandatory. Installation should be carried at least at 18°C. This temperature should be maintained for 24 hours before and after installation.